

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
22 March 2001 (22.03.2001)

PCT

(10) International Publication Number  
**WO 01/19744 A1**(51) International Patent Classification<sup>7</sup>: C03C 13/00

DY13 8QR (GB). MARTIN, Jean-Louis [FR/FR]; Thermal Ceramics de France S.A., Lieu dit les Plantees, B.P.4., F-42680 St-Marcellin-en-Forez (FR).

(21) International Application Number: PCT/GB00/03275

(22) International Filing Date: 24 August 2000 (24.08.2000)

(74) Agent: PHILLIPS &amp; LEIGH; 5 Pemberton Row, London EC4A 3BA (GB).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

9921504.8	10 September 1999 (10.09.1999)	GB
9924867.6	20 October 1999 (20.10.1999)	GB

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.(71) Applicant (*for all designated States except US*): THE MORGAN CRUCIBLE COMPANY PLC [GB/GB]; Morgan House, Madeira Walk, Windsor, Berkshire SL4 1EP (GB).(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

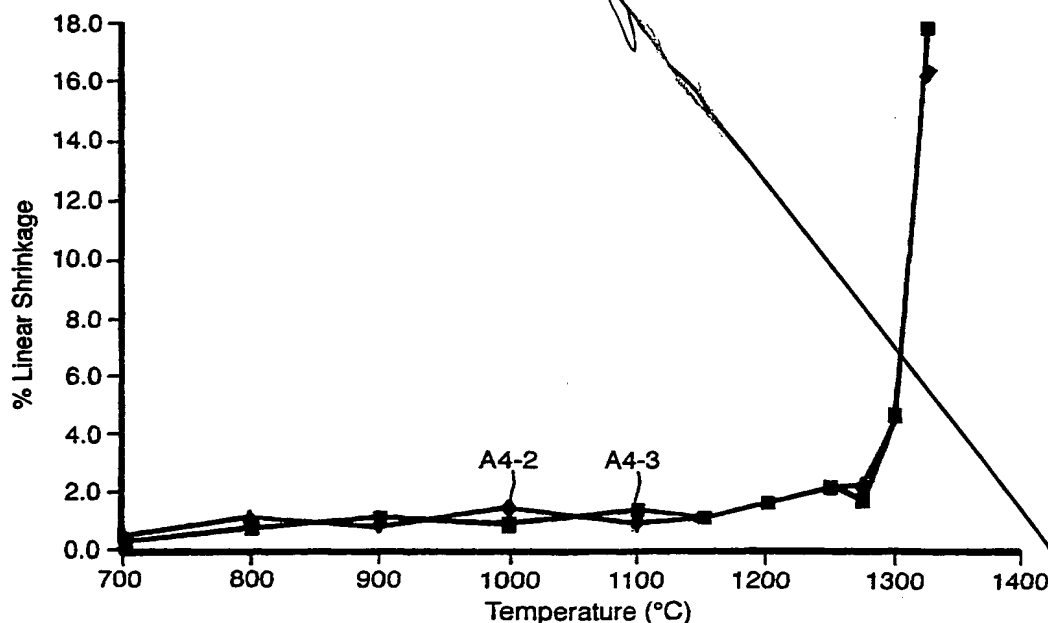
(75) Inventors/Applicants (*for US only*): JUBB, Gary, Anthony [GB/GB]; Morgan Materials Technology Limited, Bewdley Road, Stourport-on-Severn, Worcestershire

Published:

— With international search report.

[Continued on next page]

(54) Title: HIGH TEMPERATURE RESISTANT SALINE SOLUBLE FIBRES

(57) Abstract: A fibre is disclosed having a maximum use temperature of 1200 °C or more which comprises: SiO<sub>2</sub> > 64.25 wt % CaO > 18 wt % MgO < 17 wt % and in which the amount of MgO in mol % is greater than the amount of CaO in mol %. Such fibres have high solubility and low dustiness.

WO 01/19744 A1

1007555-071302

WO 01/19744 A1



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*